
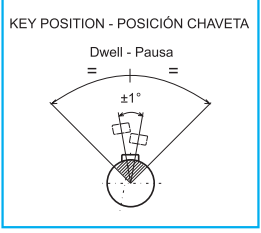


# INDEX TABLE


**IT**  
**100**

# MESA DE GIRO

CAD File: IT100  
2D - 3D



<b>ENG</b>	<b>WEIGHT</b>	
	13 Kg	44 Lbs
	CAST ALUMINUM ALLOY HOUSING	
	CONVENTIONAL REPRESENTATION	
	REPRESENTACION CONVENCIONAL	
	CAJA EN ALEACION LIGERA	
	13 Kg	44 Lbs
<b>ESP</b>	<b>PESO</b>	

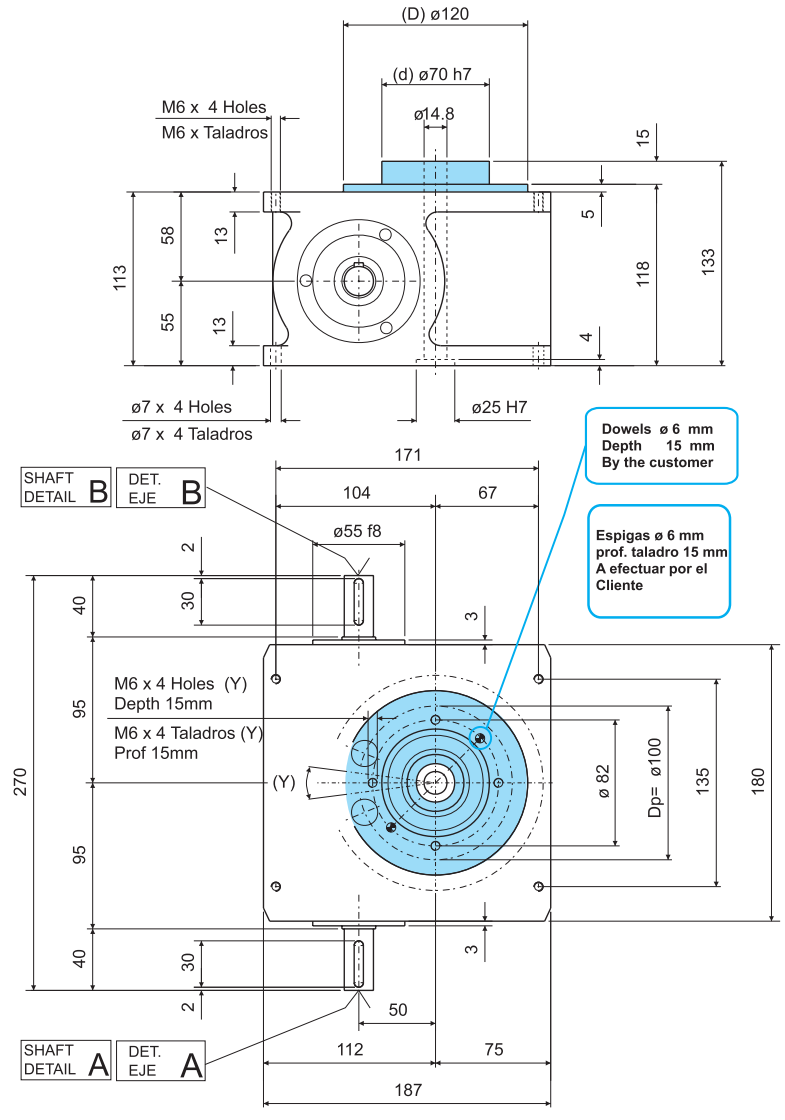

Rotating element - Elemento de Giro

 SHAFT A - B d1 a b c	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1	
				Standard	2 cycles cam	3 cycle cam			
STD diameter	19 <sup>16</sup>	21.5	6	6		*	0.25 mm 30'		
MAX diameter	22	24.5	6	6	± 0.02 mm ± 1'22"	± 0.03 mm ± 2'3"			± 0.04 mm ± 2'44"
Diámetro MAX	22	24.5	6	6	± 0.02 mm ± 1'22"	± 0.03 mm ± 2'3"	± 0.04 mm ± 2'44"	0.35 mm 30'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
Diámetro SDT	19 <sup>16</sup>	21.5	6	6	± 0.015 mm		*		
 EJE A - B d1 a b c	Referencia	Concentricidad	Planaridad	Estándar	2 Principios	3 Principios	(Y) Posición taladros		
				Ripetibilità con referencia al radio primitivo RP	Precisiones superiores a pedido				