
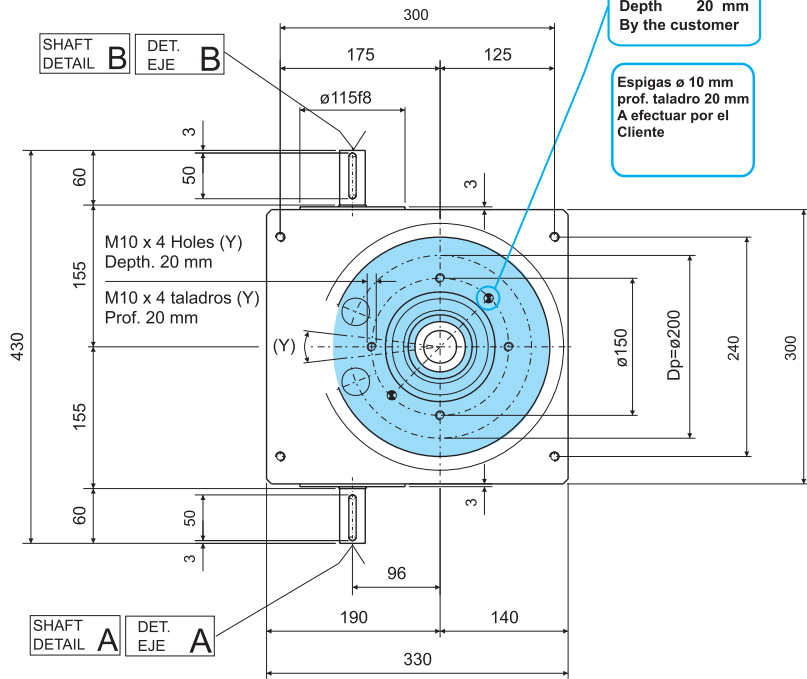
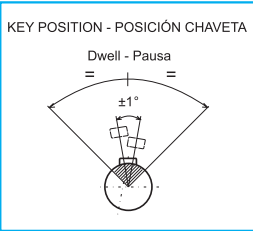



# INDEX TABLE

**IT**  
**200**

# MESA DE GIRO

CAD File: IT200  
2D - 3D

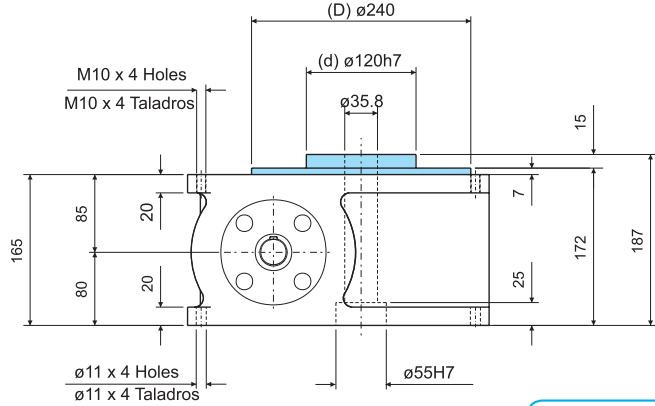

ENG WEIGHT	
83 Kg	183 Lbs
CAST IRON ALLOY HOUSING CONVENTIONAL REPRESENTATION	
REPRESENTACION CONVENCIONAL CAJA EN FUNDICION	
83 Kg	183 Lbs
ESP PESO	

Rotating element - Elemento de Giro

 SHAFT A - B  EJE A - B	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1	
				Standard	2 cycles cam	3 cycle cam			
d	± 0.015 mm				*		0.4 mm 18'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1	
STD diameter	d <sub>1</sub>	a	b	c	D	± 0.015 mm			
MAX diameter	32	35	10	8	Dp	± 0.02 mm ± 41"	± 0.03 mm ± 1'12"		± 0.04 mm ± 1'22"
Diámetro MAX	32	35	10	8	Dp	± 0.02 mm ± 41"	± 0.03 mm ± 1'12"		± 0.04 mm ± 1'22"
Diámetro SDT	d <sub>1</sub>	a	b	c	D	± 0.015 mm		0.4 mm 18'	
d	± 0.015 mm						*		
Reference	Referencia	Concentricidad	Planaridad	Estándar	2 Principios	3 Principios	(Y) Posición taladros		
				Ripetibilità con referencia al radio primitivo RP Precisiones superiores a pedido					