INDEX TABLE IT 300 MESA DE GIRO

CAD File: IT300
2D - 3D

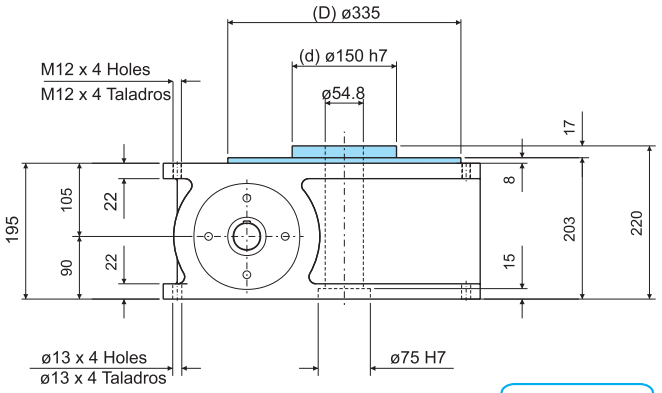





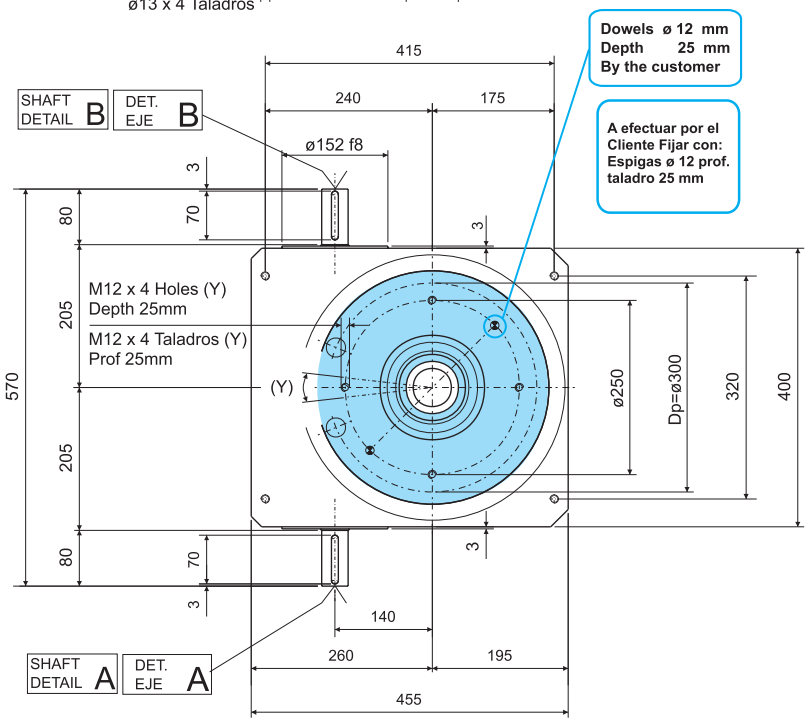

ENG	WEIGHT	
	165 Kg	364 Lbs
	CAST IRON ALLOY HOUSING	
	CONVENTIONAL REPRESENTATION	



	REPRESENTACION CONVENCIONAL	
	CAJA EN FUNDICION	
	165 Kg	364 Lbs
ESP	PESO	

Rotating element - Elemento de Giro



	d1	a	b	c	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request Standard	2 cycles cam	3 cycle cam	(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1
					d	± 0.02 mm			*		0.6 mm 18'	
STD diameter	38 k6	41	10	8	D		± 0.02 mm					
MAX diameter	42	45	12	8	Dp			± 0.02 mm ± 27"	± 0.03 mm ± 40"	± 0.04mm ± 54"		
Diámetro MAX	42	45	12	8	Dp			± 0.02 mm ± 27"	± 0.03 mm ± 40"	± 0.04mm ± 54"		
Diámetro SDT	38 k6	41	10	8	D		± 0.02 mm				0.6 mm 18'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
					d	± 0.02 mm			*			



ESP	d1	a	b	c	Referencia	Concentricidad	Planaridad	Estándar	2 Principios	3 Principios	(Y) Posición taladros	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
								Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido				