



# INDEX TABLE


**IT**  
**450**

# MESA DE GIRO

CAD File: IT450  
2D - 3D



<b>ENG</b>	<b>WEIGHT</b>	
	560 Kg	1235 Lbs
	CAST IRON ALLOY HOUSING CONVENTIONAL REPRESENTATION	
	REPRESENTACION CONVENCIONAL CAJA EN FUNDICION	
<b>ESP</b>	<b>PESO</b>	
	560 Kg	1235 Lbs

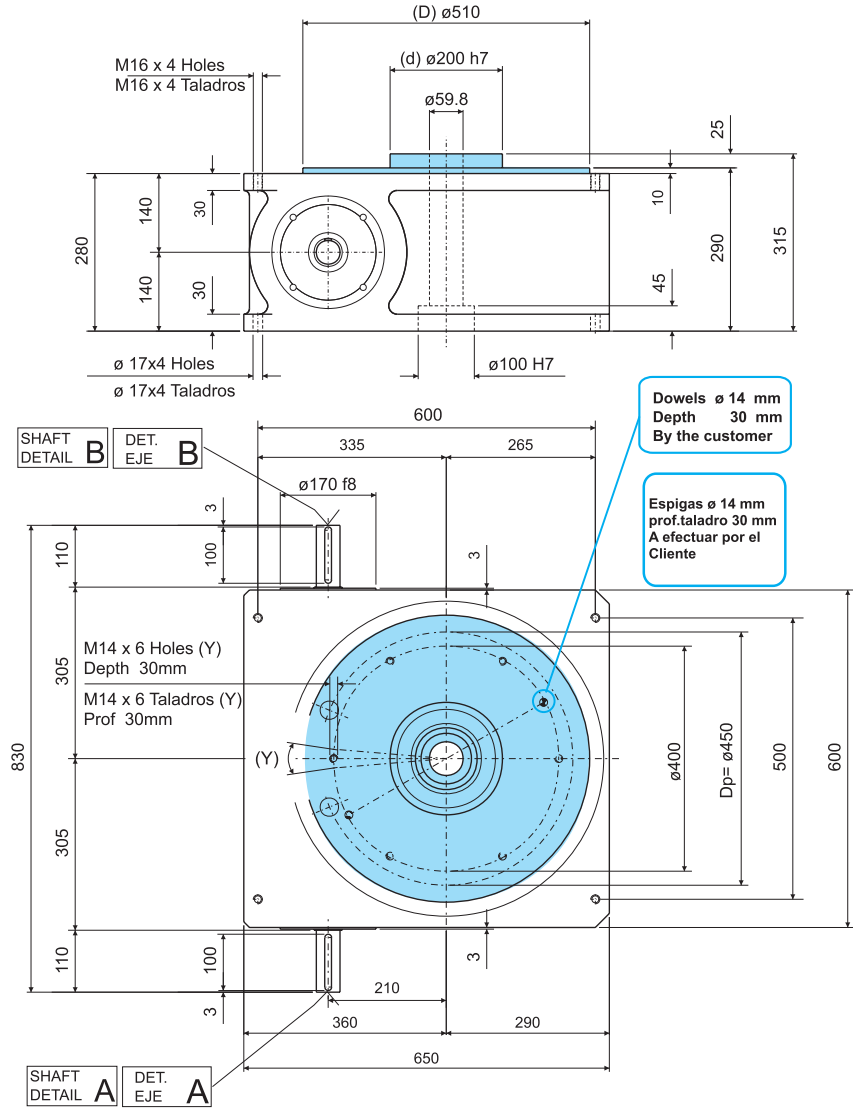

Rotating element - Elemento de Giro

 SHAFT A - B d1 a b c  EJE A - B d1 a b c	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1
				Standard	2 cycles cam	3 cycle cam		
STD diameter	d	± 0.02 mm			*		0.65 mm 12'	
MAX diameter	Dp		± 0.02 mm	± 0.02 mm ± 18"	± 0.03 mm ± 27"	± 0.04 mm ± 36"		
Diámetro MAX	Dp			± 0.02 mm ± 18"	± 0.03 mm ± 27"	± 0.04 mm ± 36"	0.65 mm 12'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
Diámetro SDT	D	± 0.02 mm			*			
	Referencia	Concentricidad	Planaridad	Estándar	2 Principios	3 Principios	(Y) Posición taladros	
				Ripetibilità con referencia al radio primitivo RP	Precisiones superiores a pedido			