




CAD File: TR 210
2D - 3D

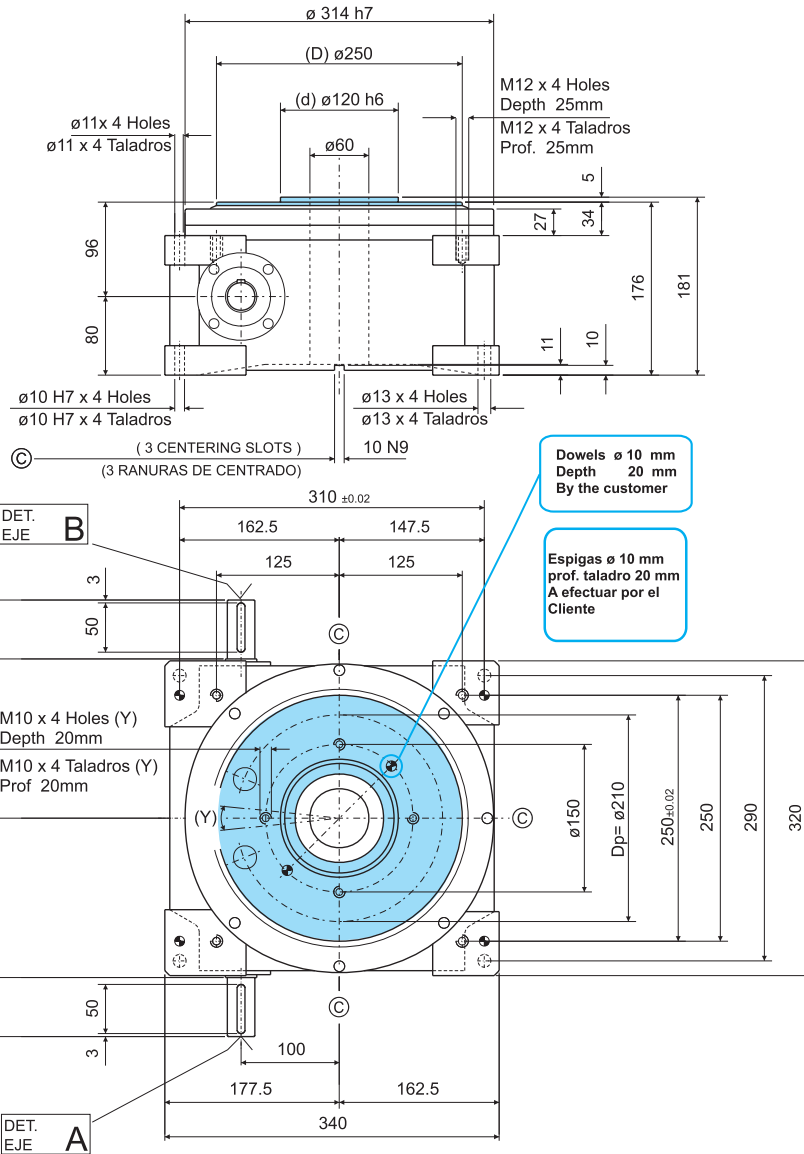

ENG	WEIGHT	
	76 Kg	167 Lbs
	CAST IRON ALLOY HOUSING	
	CONVENTIONAL REPRESENTATION	
	REPRESENTACION CONVENCIONAL	
	CAJA EN FUNDICION	
	76 Kg	167 Lbs
ESP	PESO	

Rotating element - Elemento de Giro

ENG	SHAFT A - B	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1
					Standard	2 cycles cam	3 cycle cam		
		d	± 0.01 mm			*		0.4 mm 18'	
		STD diameter		± 0.01 mm					
		MAX diameter			± 0.02 mm ± 39"	± 0.03 mm ± 59"	± 0.04 mm ± 1'18"	0.4 mm 18'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
		Diámetro MAX			± 0.02 mm ± 39"	± 0.03 mm ± 59"	± 0.04 mm ± 1'18"		
		Diámetro SDT		± 0.01 mm				0.4 mm 18'	
		EJE A - B				*			
ESP		Referencia	Concentricidad	Planaridad	Estándar 2 Principios 3 Principios Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido			(Y) Posición taladros	