
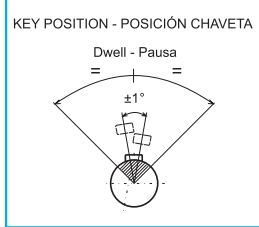


INDEX TABLE


**TR
315**

MESA DE GIRO

CAD File: TR 315
2D - 3D



ENG WEIGHT	
193 Kg	425 Lbs
CAST IRON ALLOY HOUSING CONVENTIONAL REPRESENTATION	
REPRESENTACION CONVENCIONAL CAJA EN FUNDICION	
193 Kg	425 Lbs
ESP PESO	

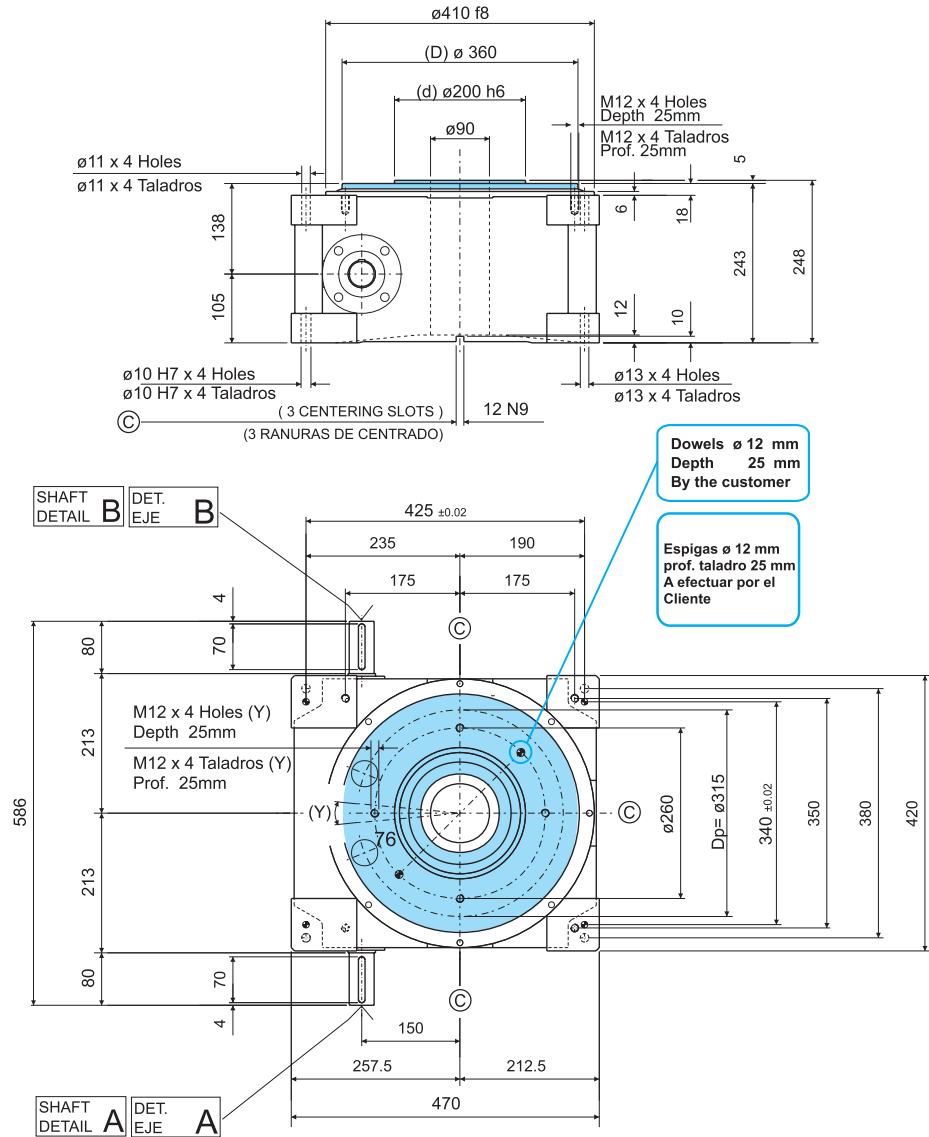

Rotating element - Elemento de Giro

 SHAFT A - B	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1				
	d	± 0.02 mm		Standard	2 cycles cam	3 cycle cam						
STD diameter	38 ^{h8}	41	10	8	D		± 0.02 mm		*		0.6 mm 18'	
MAX diameter	42	45	12	8	Dp		± 0.02 mm $\pm 26''$	± 0.03 mm $\pm 39''$	± 0.04 mm $\pm 52''$			
Diámetro MAX	42	45	12	8	Dp		± 0.02 mm $\pm 26''$	± 0.03 mm $\pm 39''$	± 0.04 mm $\pm 52''$			
Diámetro SDT	38 ^{h8}	41	10	8	D		± 0.02 mm		*		0.6 mm 18'	
 EJE A - B	Referencia	Concentricidad	Planaridad	Estándar 2 Principios 3 Principios Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido			(Y) Posición taladros	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1				