INDEX TABLE TR 470 MESA DE GIRO

CAD File: TR 470
2D - 3D

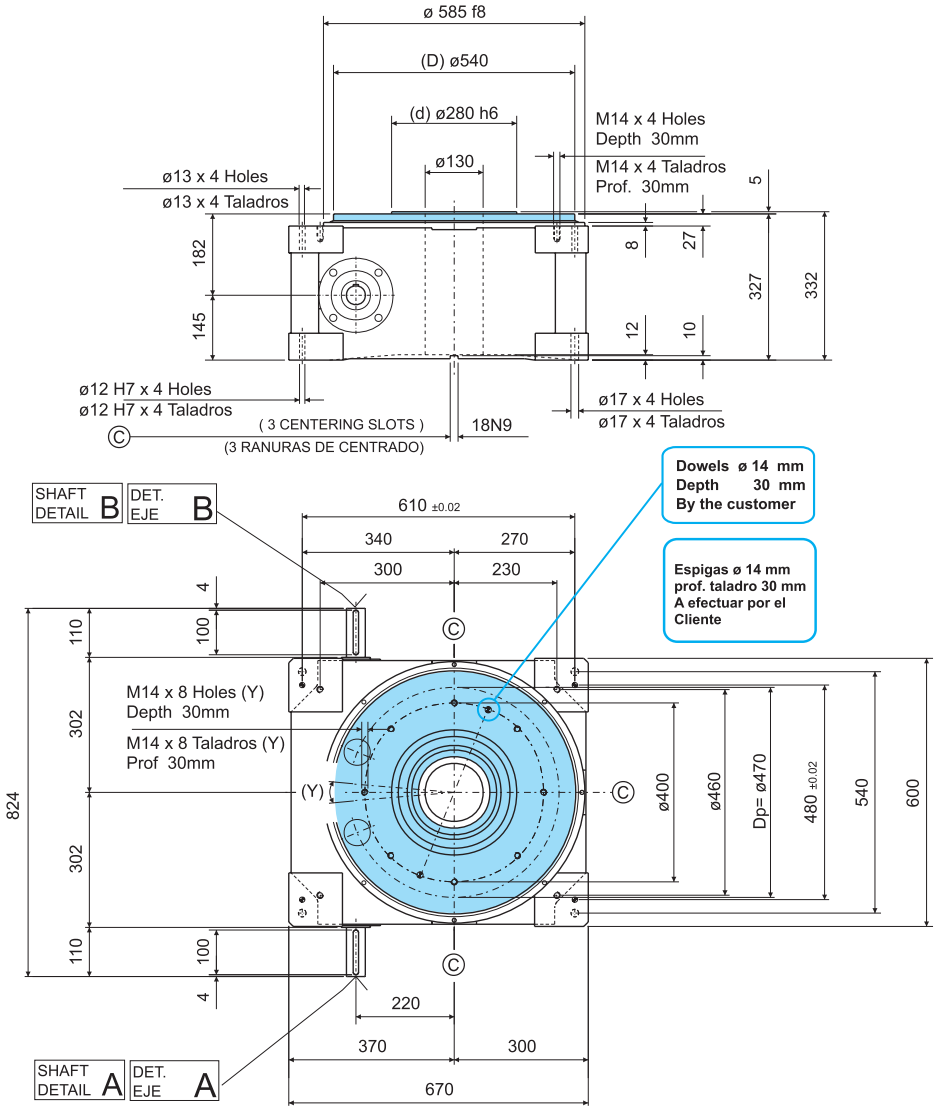





ENG	WEIGHT	
	600 Kg	1323 Lbs
	CAST IRON ALLOY HOUSING	
	CONVENTIONAL REPRESENTATION	



	REPRESENTACION CONVENCIONAL	
	CAJA EN FUNDICION	
	600 Kg	1323 Lbs
ESP	PESO	

Rotating element - Elemento de Giro

 SHAFT A - B					Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1
	d1	a	b	c				Standard	2 cycles cam	3 cycle cam		
					d	± 0.02 mm			*		0.7mm 12'	
STD diameter	42 k6	45	12	8	D		± 0.02 mm					
MAX diameter	65	69	18	11	Dp			± 0.02 mm ± 17"	± 0.03 mm ± 25"	± 0.04mm ± 34"		
Diámetro MAX	65	69	18	11	Dp			± 0.02 mm ± 17"	± 0.03 mm ± 25"	± 0.04mm ± 34"	0.7mm 12'	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1
Diámetro SDT	42 k6	45	12	8	D		± 0.02mm					
 EJE A - B					d	± 0.02 mm			*			
					Referencia	Concentricidad	Planaridad	Estándar	2 Principios	3 Principios	(Y) Posición taladros	
								Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido				

ENG / ESP