
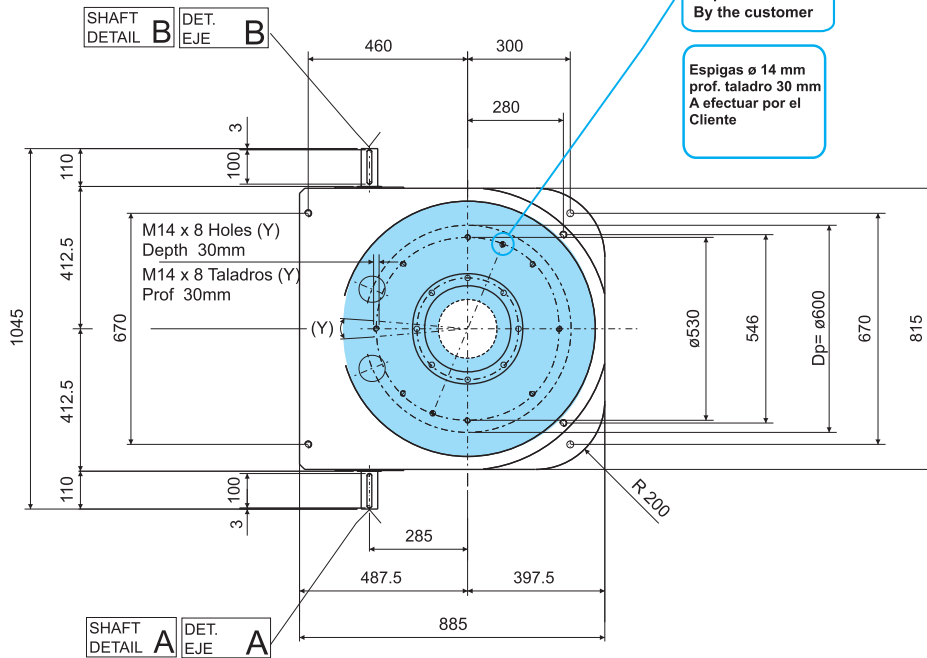




CAD File: TR 600  
2D - 3D

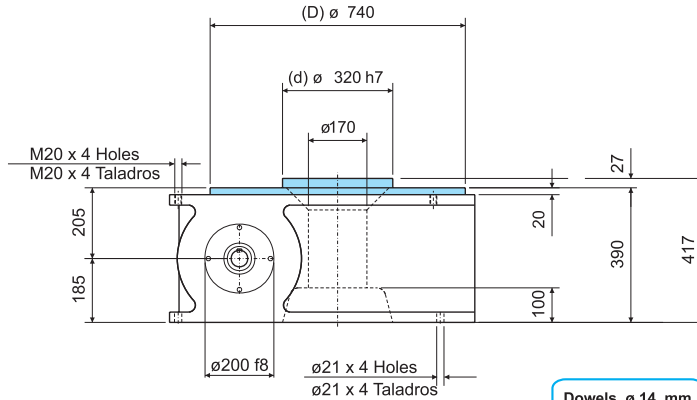

<b>ENG</b>	<b>WEIGHT</b>	
	1170 Kg	2574 Lbs
CAST IRON ALLOY HOUSING CONVENTIONAL REPRESENTATION		
REPRESENTACION CONVENCIONAL CAJA EN FUNDICION		
1170 Kg		2574 Lbs
<b>ESP</b>	<b>PESO</b>	

Rotating element - Elemento de Giro

<b>ENG</b>		Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1					
		d	± 0.02 mm		Standard	2 cycles cam	3 cycle cam							
		STD diameter	48 <sup>±0.02</sup>	51.5	14	9	D		± 0.04 mm		*		0.8 mm 12'	
		MAX diameter	70	74.5	20	12	Dp		± 0.02 mm ± 14"	± 0.03 mm ± 21"	± 0.04 mm ± 28"			
		Diámetro MAX	70	74.5	20	12	Dp		± 0.02 mm ± 14"	± 0.03 mm ± 21"	± 0.04 mm ± 28"			
		Diámetro SDT	48 <sup>±0.02</sup>	51.5	14	9	D		± 0.04 mm		*		0.8 mm 12'	
			d	± 0.02 mm							*			
<b>ESP</b>		Referencia	Concentricidad	Planaridad	Estándar 2 Principios 3 Principios Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido			(Y) Posición taladros	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1					