
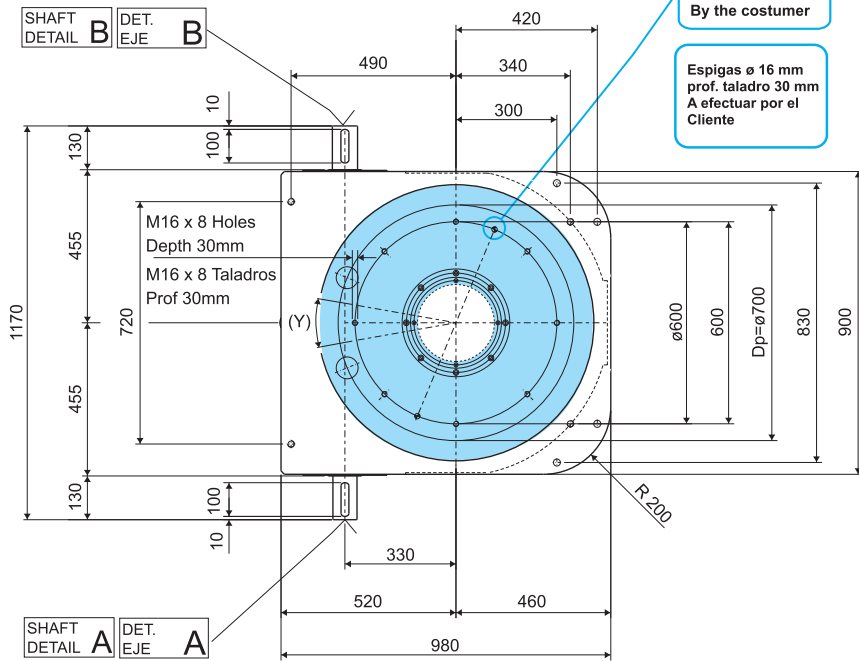
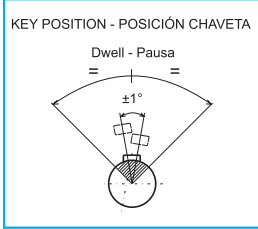



# INDEX TABLE

**TR  
700**

# MESA DE GIRO

CAD File: TR 700  
2D - 3D

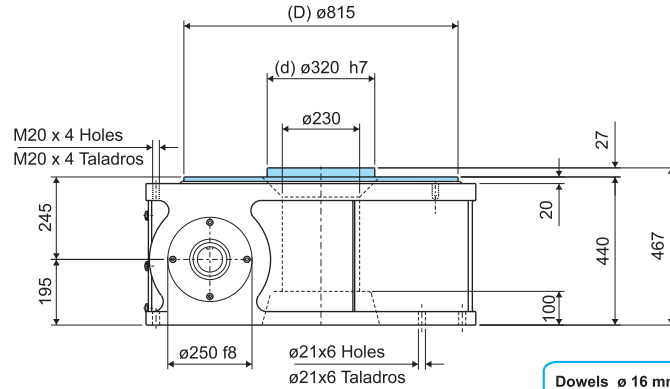

<b>ENG</b>	WEIGHT	
	1600 Kg	3528 Lbs
	CAST IRON ALLOY HOUSING CONVENTIONAL REPRESENTATION	
	REPRESENTACION CONVENCIONAL CAJA EN FUNDICION	
	1600 Kg	3528 Lbs
<b>ESP</b>	PESO	

Rotating element - Elemento de Giro

 SHAFT A - B	Reference	Concentricity	Planarity	Repeatability referred to pitch radius Rp Higher precision levels on request			(Y) Position of the threaded holes	General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1										
	d	± 0.05 mm		Standard	2 cycles cam	3 cycle cam												
STD diameter	75 <sup>h8</sup>	79.5	20	12	D		± 0.05mm		*									
MAX diameter	100	106	28	16	Dp			± 0.02 mm ± 12"	± 0.03 mm ± 18"	± 0.04mm ± 24"								
Diámetro MAX	100	106	28	16	Dp			± 0.02 mm ± 12"	± 0.03 mm ± 18"	± 0.04mm ± 24"								
Diámetro SDT	75 <sup>h8</sup>	79.5	20	12	D		± 0.04mm											
	d	± 0.02 mm							*									
 EJE A - B	Referencia	Concentricidad	Planaridad	Estándar 2 Principios 3 Principios Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido			(Y) Posición taladros	Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1										