# INDEX TABLE TR 80 MESA DE GIRO

CAD File: TR 80
2D - 3D

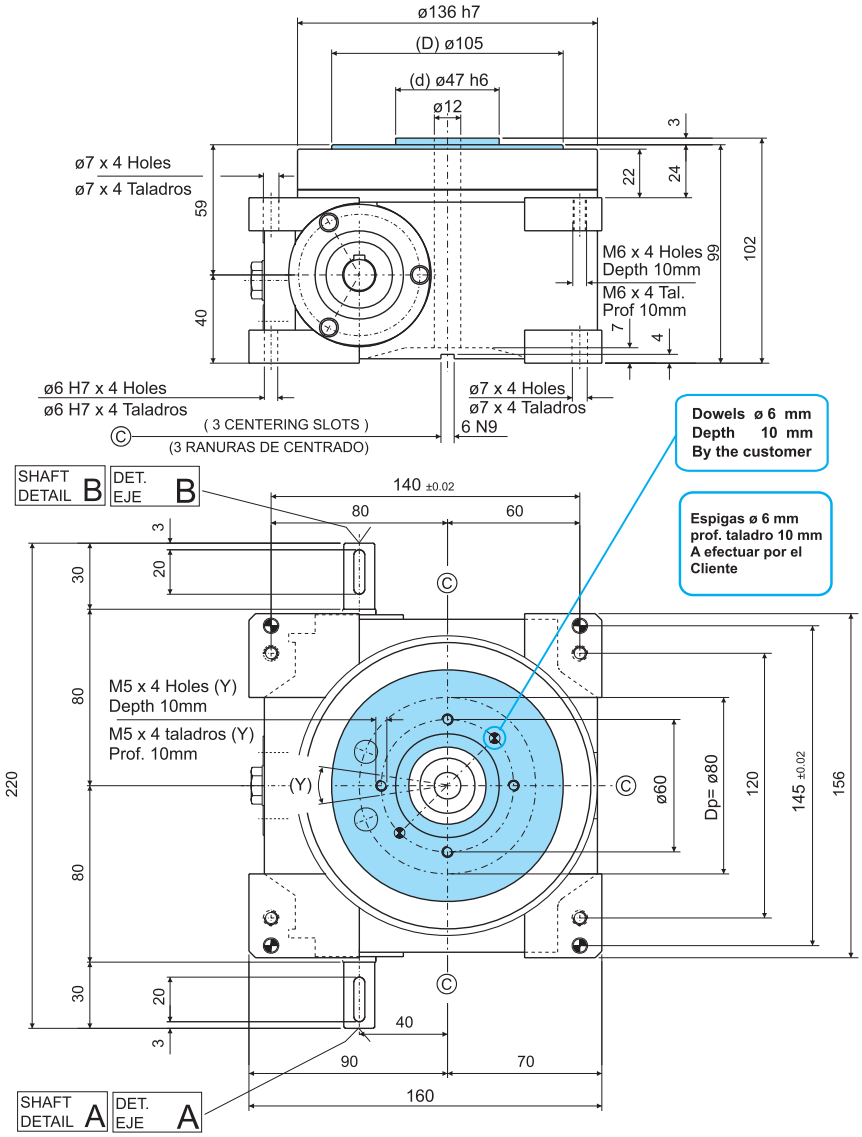








| ENG | WEIGHT |
|---|---|
| 6.8 Kg | 14.9 Lbs |

CAST ALUMINUM ALLOY HOUSING
CONVENTIONAL REPRESENTATION



REPRESENTACION CONVENCIONAL
CAJA EN ALEACION LIGERA

| | |
|---|---|
| 6.8 Kg | 14.9 Lbs |
| ESP | PESO |

Rotating element - Elemento de Giro



| SHAFT A - B | d1 | a | b | c | Reference | Concentricity | Planarity | Repeatability referred to pitch radius Rp Higher precision levels on request: Standard | 2 cycles cam | 3 cycle cam | (Y) Position of the threaded holes | General manufacturing tolerance in compliance with UNI - ISO 2768-1 EN 22768-1 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | d | ± 0.01 mm | | | * | | 0.25 mm 30' | |
| STD diameter | 14 k6 | 16 | 5 | 5 | D | | ± 0.01 mm | | | | | |
| MAX diameter | 15 | 17 | 5 | 5 | Dp | | | ± 0.02 mm ± 1'42" | ± 0.03 mm ± 2'34" | ± 0.04mm ± 3'24" | | |
| Diámetro MAX | 15 | 17 | 5 | 5 | Dp | | | ± 0.02 mm ± 1'42" | ± 0.03 mm ± 2'34" | ± 0.04mm ± 3'24" | 0.25 mm 30' | Tolerancias generales de fabricación con arreglo a UNI - ISO 2768-1 EN 22768-1 |
| Diámetro SDT | 14 k6 | 16 | 5 | 5 | D | | ± 0.01 mm | | | | | |
| | | | | | d | ± 0.01 mm | | | * | | | |
| | | | | | Referencia | Concentricidad | Planaridad | Estándar | 2 Principios | 3 Principios | (Y) Posición taladros | |
| | | | | | Ripetibilidad con referencia al radio primitivo RP Precisiones superiores a pedido | | | | | | | |



EJE A - B

ENG / ESP